

MANUAL WATER SOFTENER REGENERATION INSTRUCTIONS

MUST BE CARRIED OUT WEEKLY OR EVEN MORE OFTEN IN CONDITIONS OF EXTREMELY HARD WATER OR HARD USE OF MACHINE**

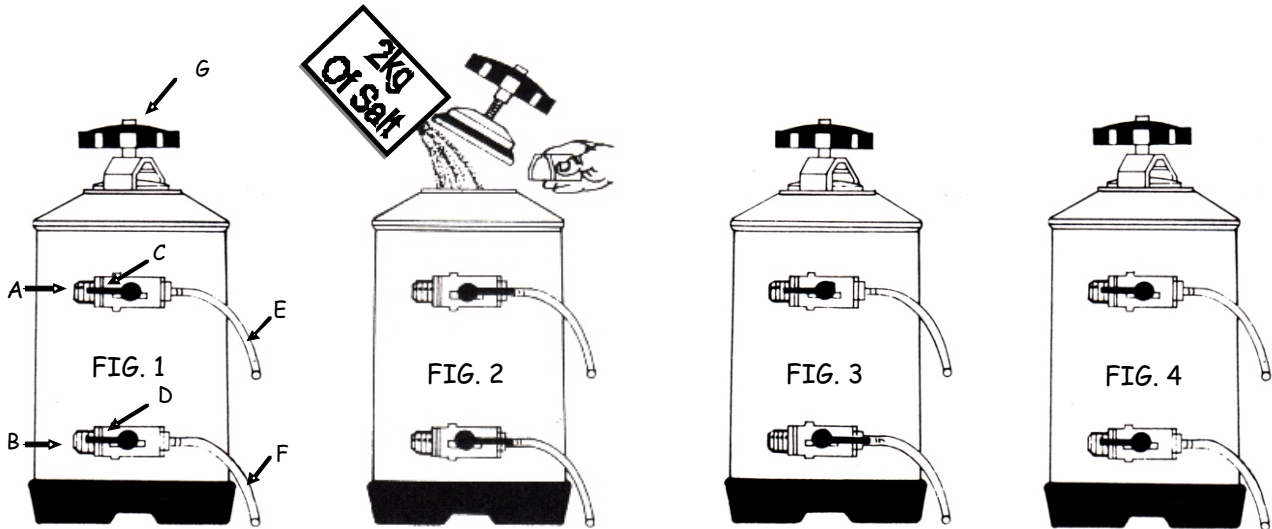


FIG. 1 Softener In Normal Use

FIG. 2 Place Tube *E* In A Bucket And Tube *F* In Sink Or Drain Turn Valves *C* & *D* To Right Approx 2 Pints Of Water Will Be Expelled Under Pressure. Slacken Nut *G* Remove Bridge And Top Cover Taking Care Not To Drop Inside Canister. Add 1kg (Approx 2 Pint Measures) Of Granular Salt To Canister And Replace Top Cover. **DO NOT OVER TIGHTEN**

FIG. 3 Turn Valve *C* To Left, Water Will Run Into Softener And Flush Salty Solution From Tube *F* Into Drain

FIG. 4 After 30 Minutes Approx. Taste Water From Softner To Ensure It Is No Longer Salty. If Salty Taste Remains, Allow Water To Continue Running, And Taste Again. When Water Is Free Of Salt Turn Valve *D* To Left.

REGENERATION IS NOW COMPLETE

NOTE: NEVER ATTEMPT TO CLEAN OUT THE INSIDE OF THE WATER SOFTENER. THEY ARE SUPPOSED TO CONTAIN A BROWN SLUSHY MATERIAL

FAILURE TO CARRY OUT MINIMUM WEEKLY REGENERATION WILL RESULT IN EXPENSIVE MACHINE REPAIRS

Bartech - serving the hospitality industry

BAR, CELLAR & KITCHEN SERVICES



- Site Survey, Consultation & Design
- Construction & Fitting
- Equipment Sales
- Installation
- After Sales Care
- Repairs
- Planned Maintenance

TESTIMONIALS

“ “We get a very good level of service from Bartech and we would recommend them!”

*Dale Naug
Grasmere House Hotel,
Salisbury*

CONTACT DETAILS

Tel. 01794 324876
Email. sales@bar-tech.co.uk
Web. www.bar-tech.co.uk

Address.
Unit 4 Gardeners Farm Business Park
Sherfield English Lane
Plaitford
Hampshire
SO51 6EJ